

**Gas Discharge Tube Lightning Arrestor
BNC Connectors**



Features:

- ✦ Multiple Strike Capability
- ✦ DC pass
- ✦ 40 kA Surge Protection
- ✦ Bi-directional Protection
- ✦ Rugged and Water Resistant

RF Specifications

- ✦ Nominal Impedance – 50 Ω
- ✦ 75Ω intermatable with excellent performance for applications to 500MHz


Frequency (GHz)	VSWR	Insertion Loss (dB)
dc – 2.5	1.25 Max	0.15 Max

- ✦ Through Current: 65V/7.5 A Max
- ✦ RF Power: See Protection Voltage table

Transient Specifications

(1.2X50μs Voltage / 8X20μs Current waveform)


- ✦ Gas Discharge Tube 90V to 600V
- ✦ Maximum Transient: 40 kA (8x20μs)
- ✦ Multiple Strike: 20kA 10 times
- ✦ Let-through: See Protection Voltage table

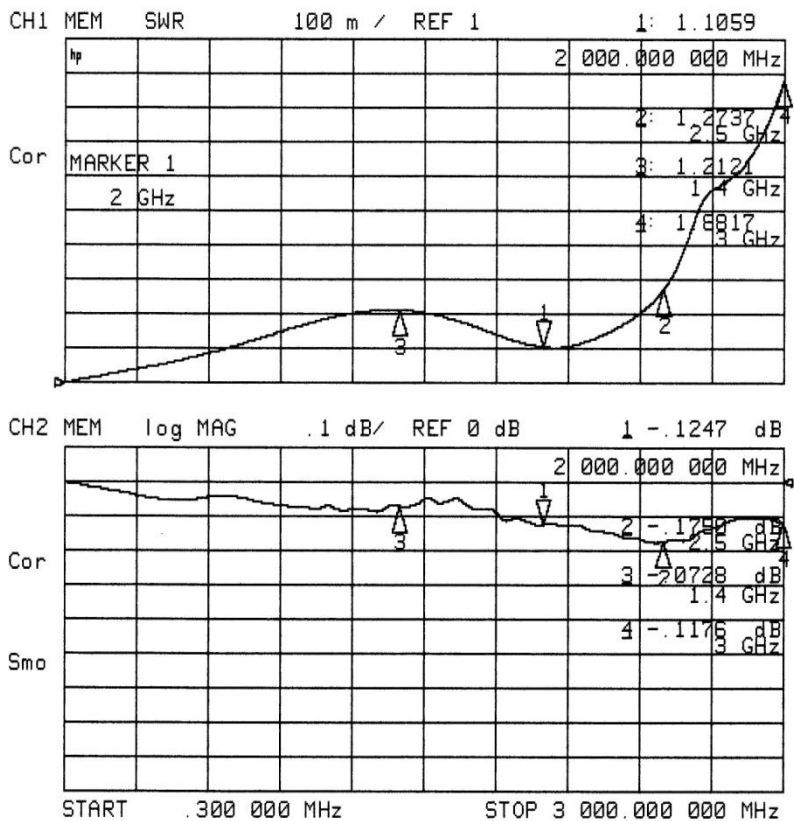



Typical VSWR and Insertion Loss

Mechanical Specifications

- ✦ Mounting/Grounding: Female to female by ϕ .500" (12.7mm) bulkhead mount with gasket or a bracket or wire lug to the bulkhead connector. Grounding of the male to female by an integral ground lug.
- ✦ Weight: 0.12 pounds typ / 55 g typ

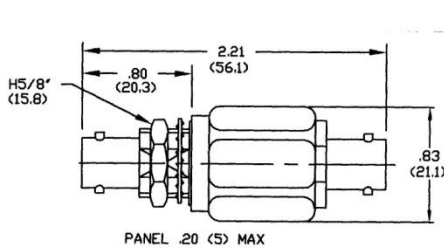

PTC BNF BNF XX S

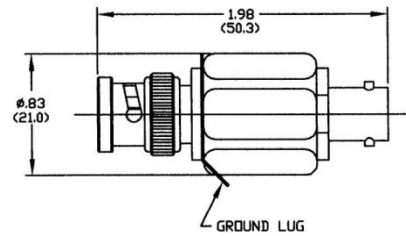

PTC BNM BNF XX S

Environmental Specifications

Temperature Range	-40°C to +90°C
Salt Fog	MIL-STD-202 Method 101D / Condition B (35°C/96 hrs)
Immersion	MIL-STD-202 Method 104A / Condition A (65°C to 25°C w/NaCl – 2 cycles)
Moisture Resistance	MIL-STD-202 Method 106E (65 °C/98% RH condensing/240 hrs)
Temperature Shock	MIL-STD-202 Method 107D / Condition B-1 (25 cycles -65°C to +125°C)
Life (Elevated Temperature)	MIL-STD-202 Method 108A / Condition A (96 hours at 100°C)
Dust and Waterproof Rating	IEC529 IP68 (dust-tight and water proof 24 hrs / 1 m)
Vibration	MIL-STD-202 Method 204D / Condition D (10Hz-2kHz 0.06"DA/20g)
Mechanical Shock	MIL-STD-202 Method 213 / Condition A (50g/11ms ~24")

Protection Voltage

Protection Voltage ⁴	Voltage Code ¹	RF Power (W) ²	Let-through (V _{pk} / mJ) ³
90	09	37	600 / 0.3
150	15	95	600 / 0.3
230	23	240	650 / 0.5
350	35	550	800 / 0.7
470	47	1000	1200 / 2.2
600	60	1600	1500 / 2.2

Material and Finish

Component	Material	Finish
Outer Parts	Brass	Nickel
Center Contact	BeCu	Gold
Insulator	PTFE	
Gasket	Elastomer	

- 1 use voltage code in ordering part number
- 2 for multiple carrier sum of peak voltage should be less than 60% of protection voltage
- 3 input is 6kV 1.2x50 μ s / 3 kA 8x20 μ s waveform
- 4 Contact NexTek for voltages geater than 600V

Part Number

